

HOW TO FIT A GOLF GRIP

mr^golf^grip

Installing a golf grip is easy for the in-experienced, however if its your first go, you may need to find a different method or technique to allow you to slide a golf grip on with ease.

Generally the thicker the butt of driver shaft, or thicker the grip (oversize), it is best to use more lubricant or additional tools.

Double sided tape

This is what all major golf companies use when fitting a golf grip.

Lubricant is used to break down the glue on the one side of the tape. When it dries, a permanent high tensile bond is created that is air bubble free, and wont move or shift due to age or heat.



HINT:
Brampton HF-100 Solvent, Methylated /Turpentine spirits make good solvents. If you are having trouble getting the grip started, apply some dish-washing liquid on the inner lip and butt end of the shaft

Glue

This is old skool club making - club pro's have been using a rubber/gel based glue for decades.

It's easy to apply and can be purchased from any hardware store for around \$9-\$10. When sliding the grip on, make sure you use plenty of glue and push all air bubbles out with your thumb and index finger.




HINT:
Dip an old shaft or long piece of dowel into the tin about 2" down. Push it up and down into the grip like a chimney sweep. Apply a little more to the butt end of the shaft to make it easier to slip on.

Technique

A sold technique is vital when fitting a golf grip. Mr Golf Grip recommends holding the grip like the adjacent.

- Lightly pinch the opening of the grip with you fore finger and thumb.
- Guide the inner bottom lip of the grip with your forefinger.

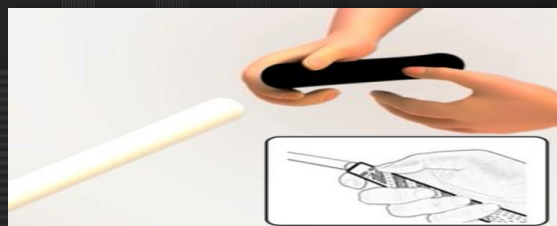

Grip Installer



An essential re-gripping tool for replacing worn-out grips - especially on big butts shafts.

- 1) Install grip tape over golf shaft and lubricate the inside of the golf grip then pour over the grip tape.
- 2) Working quickly, slip the big butt grip installer into the grip mouth as far as it will go.
- 3) Push the big butt grip installer over the shaft as far as it will go under the grip listing, and pull the tool free.

DIY Video and Step By Step Instructions

